




Fir Beaded Ceiling Specifier's Guide

- C&Btr Douglas Fir, stain grade
- 5/8" Thick, 3-1/8" Wide
- Random Lengths 6' – 20'
- Primarily used for ceilings, soffits, and paneling

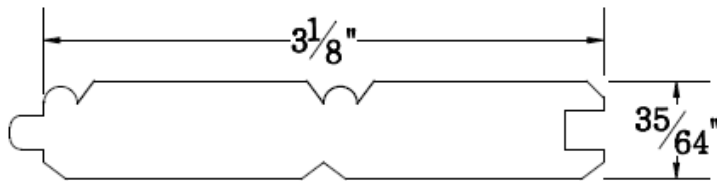

105-c. "C & BTR" - CEILING and SIDING. Ceiling and Siding of this grade are recommended and widely used where the finest appearance is required.

Pieces of this grade are of sound wood. Most pieces are entirely clear or have only a few minor and unimportant characteristics such as:

Medium stained sapwood. Heart stain firm.

Three small seasoning checks.

Light torn or raised grain.

Warp - light in occasional pieces.

Three small, sound, tight knots or their equivalent, or five small pockets or their equivalent.

A 3" cutout 4' or more from either end of pieces 12' and longer is permissible in 5% of the shipment if the piece is otherwise of a high type.

